



US007322948B2

(12) **United States Patent**  
**Talish et al.**

(10) **Patent No.:** **US 7,322,948 B2**  
(45) **Date of Patent:** **\*Jan. 29, 2008**

(54) **VIBRATIONAL LOADING APPARATUS FOR MOUNTING TO EXERCISE EQUIPMENT**

6,217,491 B1 \* 4/2001 Schiessl ..... 482/92  
6,659,918 B2 \* 12/2003 Schiessl ..... 482/92

(75) Inventors: **Roger J. Talish**, Hillsborough, NJ (US); **Kenneth J. McLeod**, Vestal, NY (US); **Clinton T. Rubin**, Port Jefferson, NY (US)

\* cited by examiner

(73) Assignee: **Juvent, Inc.**, Somerset, NJ (US)

*Primary Examiner*—Lori Amerson

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(74) *Attorney, Agent, or Firm*—Carter, DeLuca, Farrell & Schmidt, LLP

(57) **ABSTRACT**

This patent is subject to a terminal disclaimer.

A therapeutic device, such as an exercise device, includes the principles of osteogenic repair by incorporating a loading mechanism into the exercise device. By doing so, the therapeutic device provides an increased osteogenic effect, thereby enhancing the benefits of the therapy. As an example, a exercise device includes a support surface for supporting all or part of the bodily tissue of an individual using the device. A linear or rotary loading mechanism associated with the frame or a rotational element of the exercise device drives the support surface at a selected load and frequency, thereby inducing mechanical loading of bodily tissue adjacent to the support surface sufficiently to facilitate the growth, development, strengthening, and/or healing of bone tissue. The loading mechanism may be incorporated into any exercise device, including standard exercise devices such as rowing machines, stair climbing machines, elliptical trainers, bicycles, cross-country ski trainers, treadmills, or weight trainers.

(21) Appl. No.: **11/087,248**

(22) Filed: **Mar. 23, 2005**

(65) **Prior Publication Data**

US 2005/0165332 A1 Jul. 28, 2005

(51) **Int. Cl.**  
**A63B 23/00** (2006.01)

(52) **U.S. Cl.** ..... **601/49**; 482/148

(58) **Field of Classification Search** ..... 482/148;  
601/49


See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

6,032,677 A \* 3/2000 Blechman et al. .... 128/899

**23 Claims, 9 Drawing Sheets**

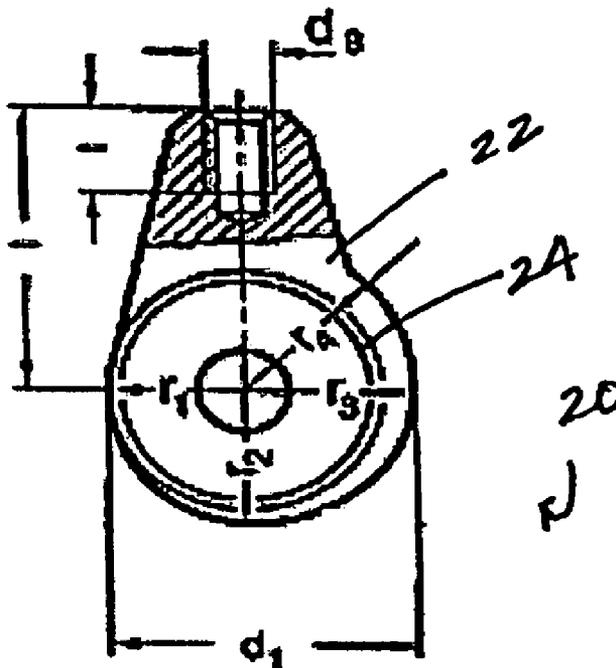

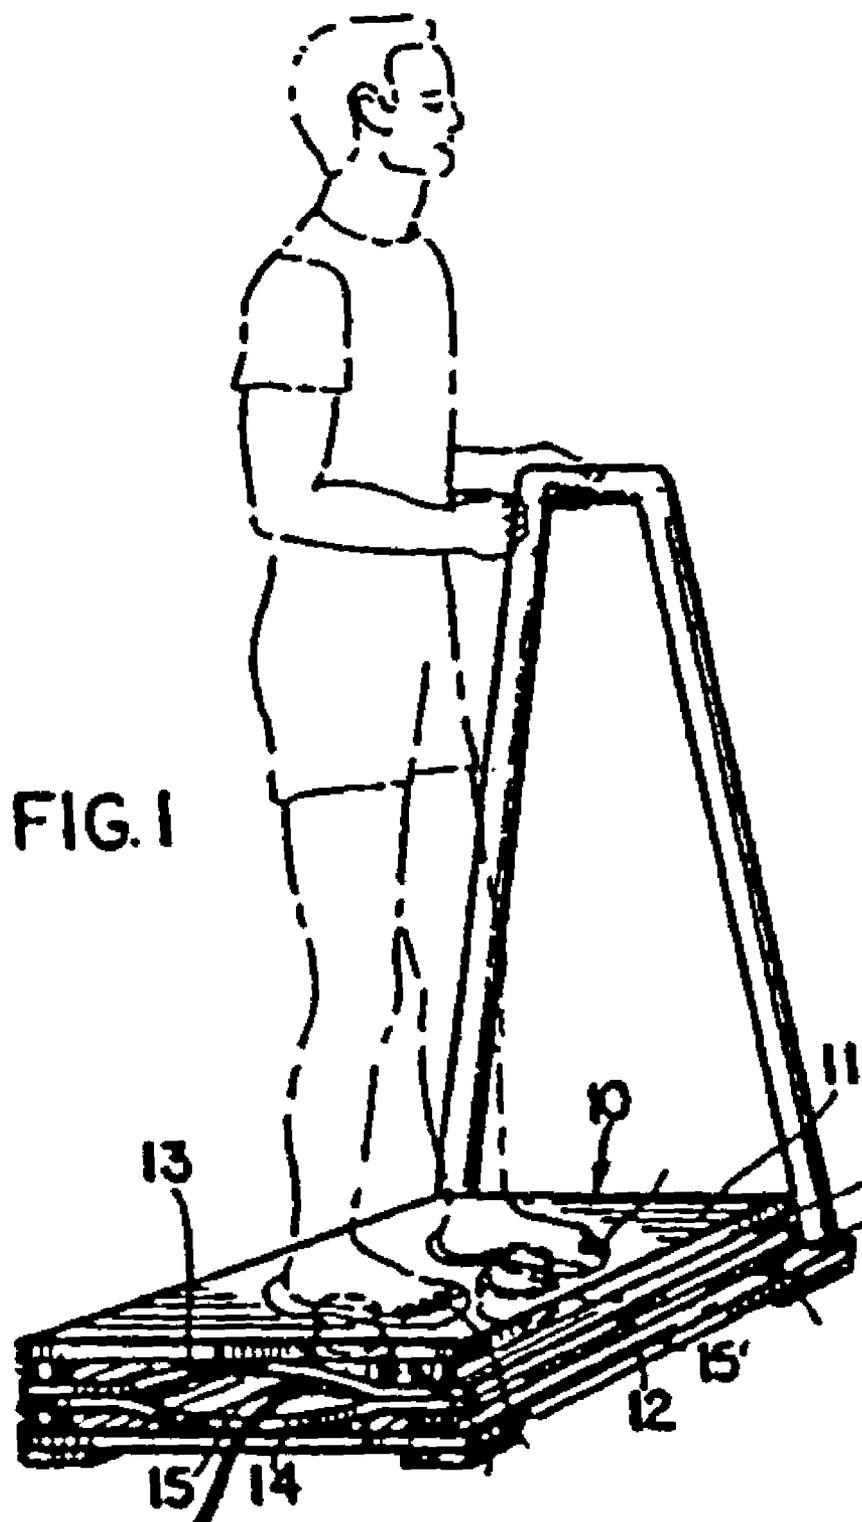

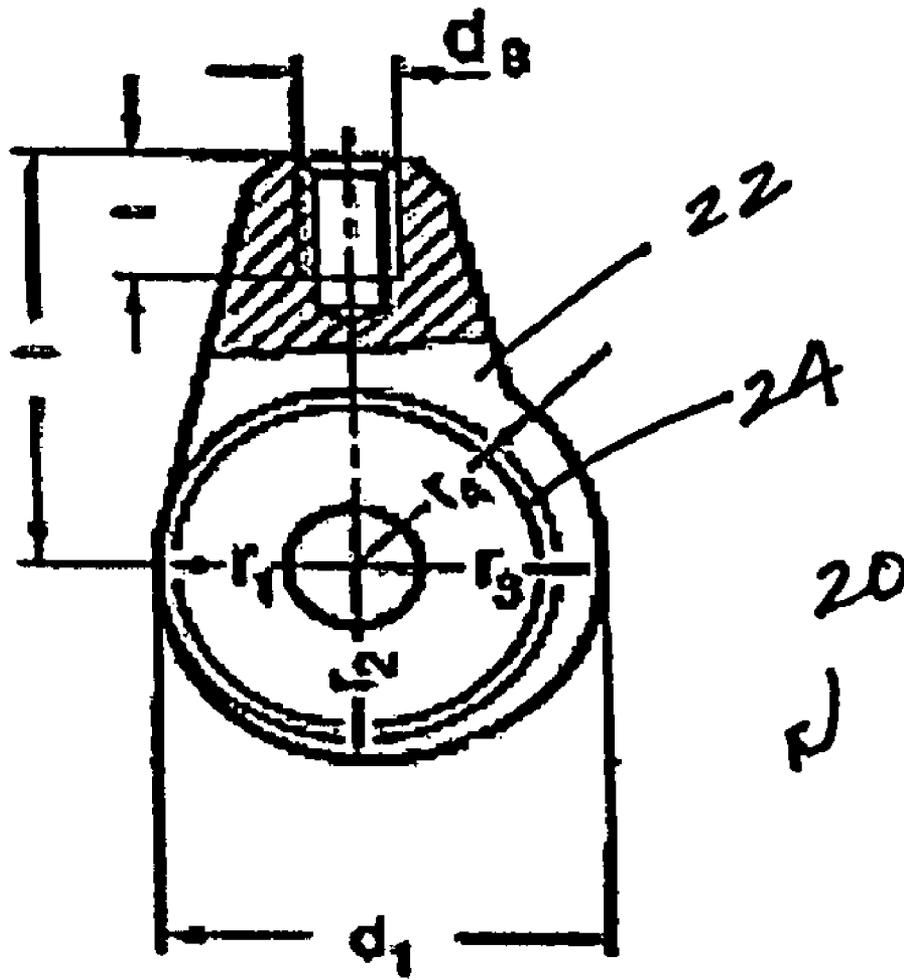


FIG. 2

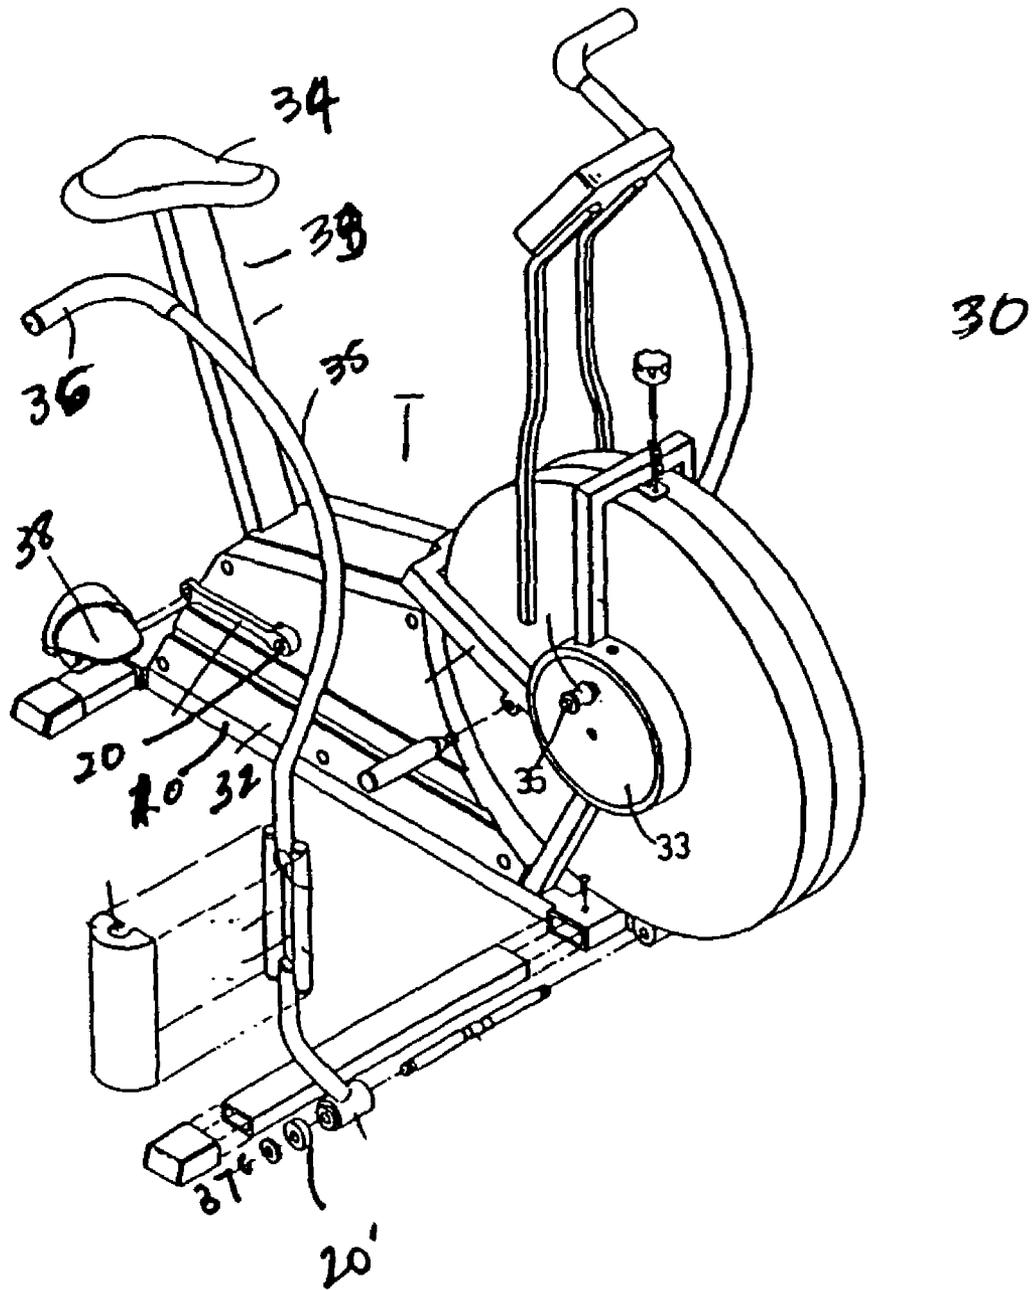
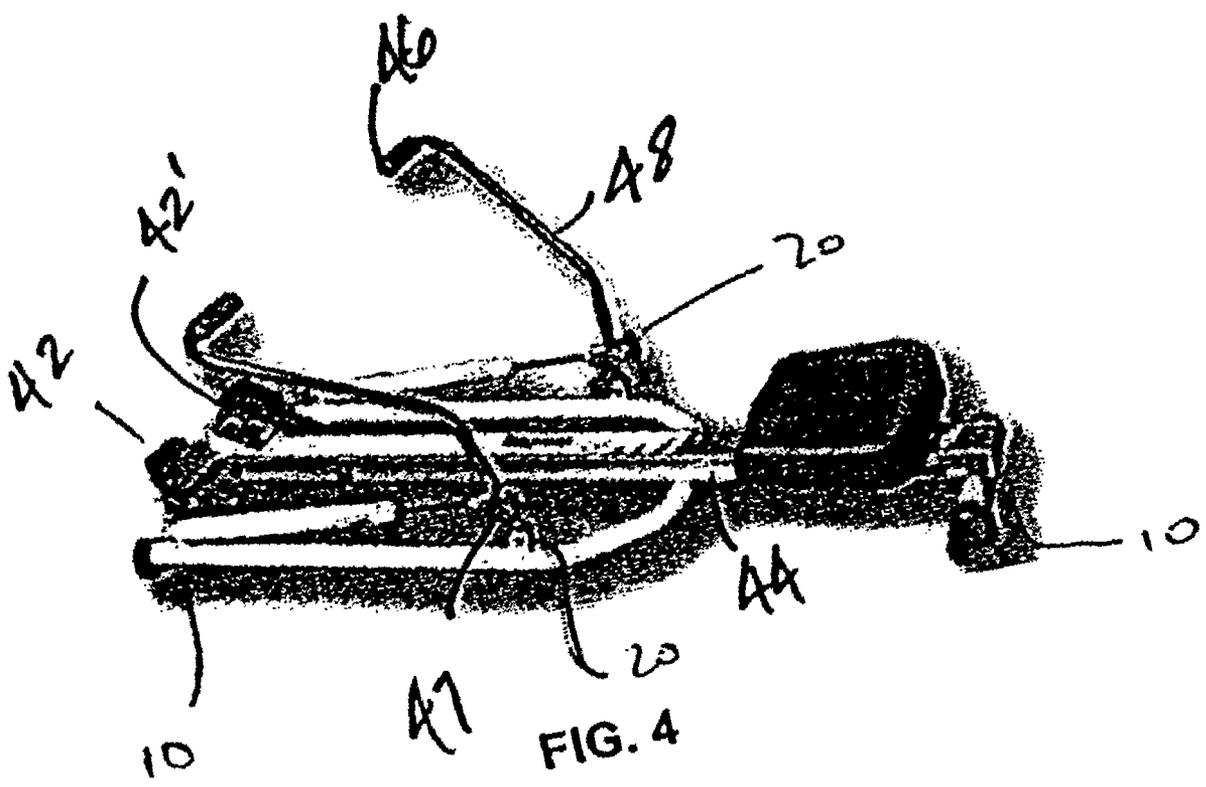


FIG. 3



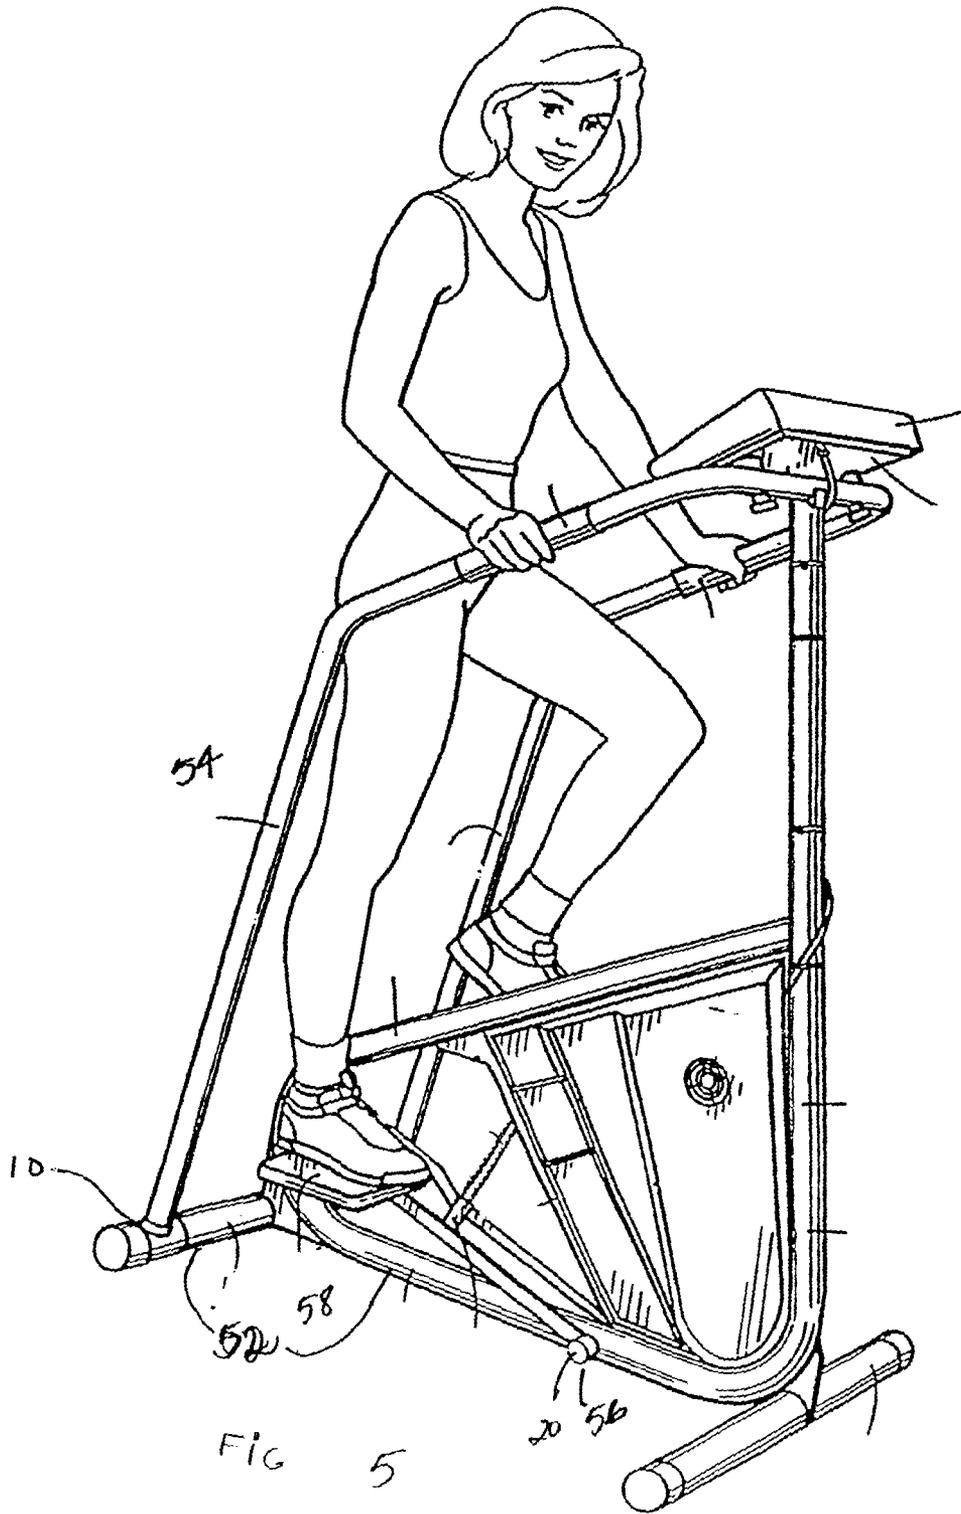


FIG 5

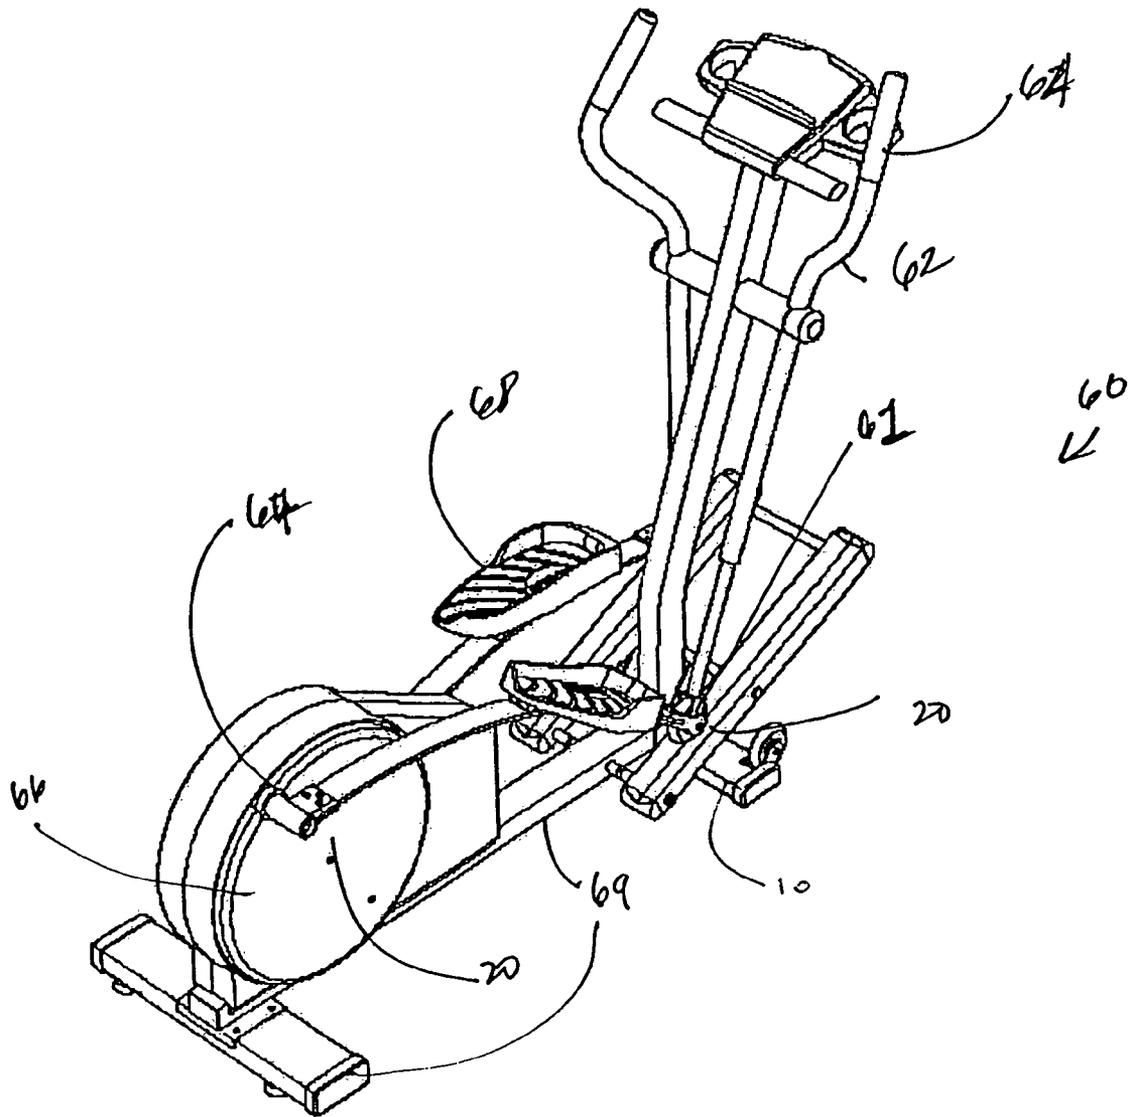


FIG. 6



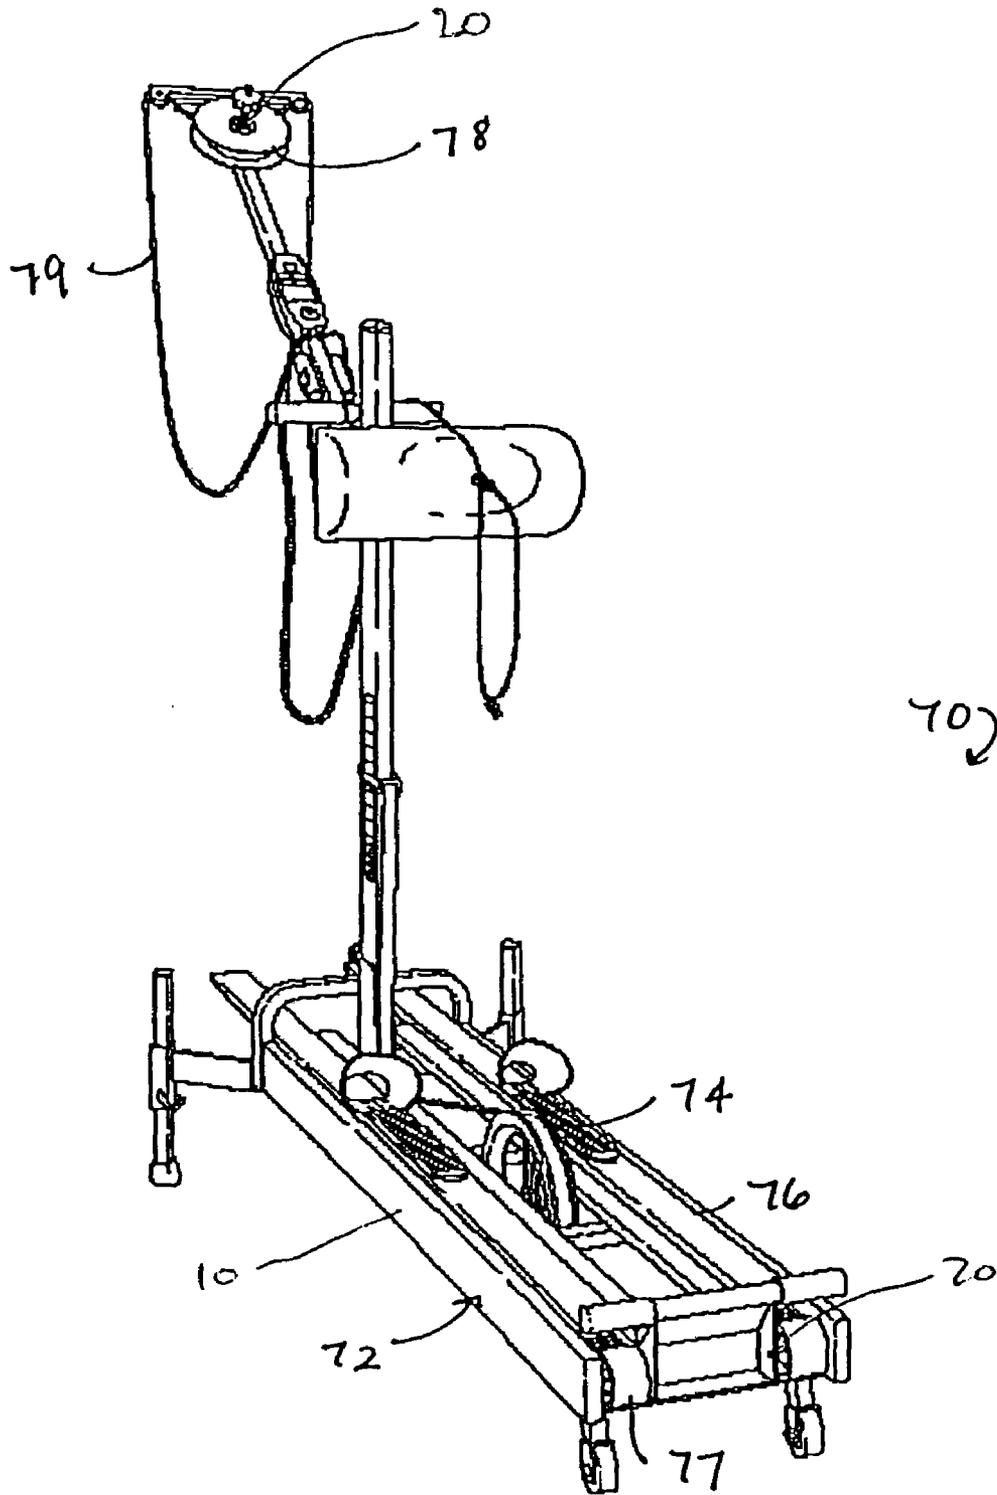


FIG. 7

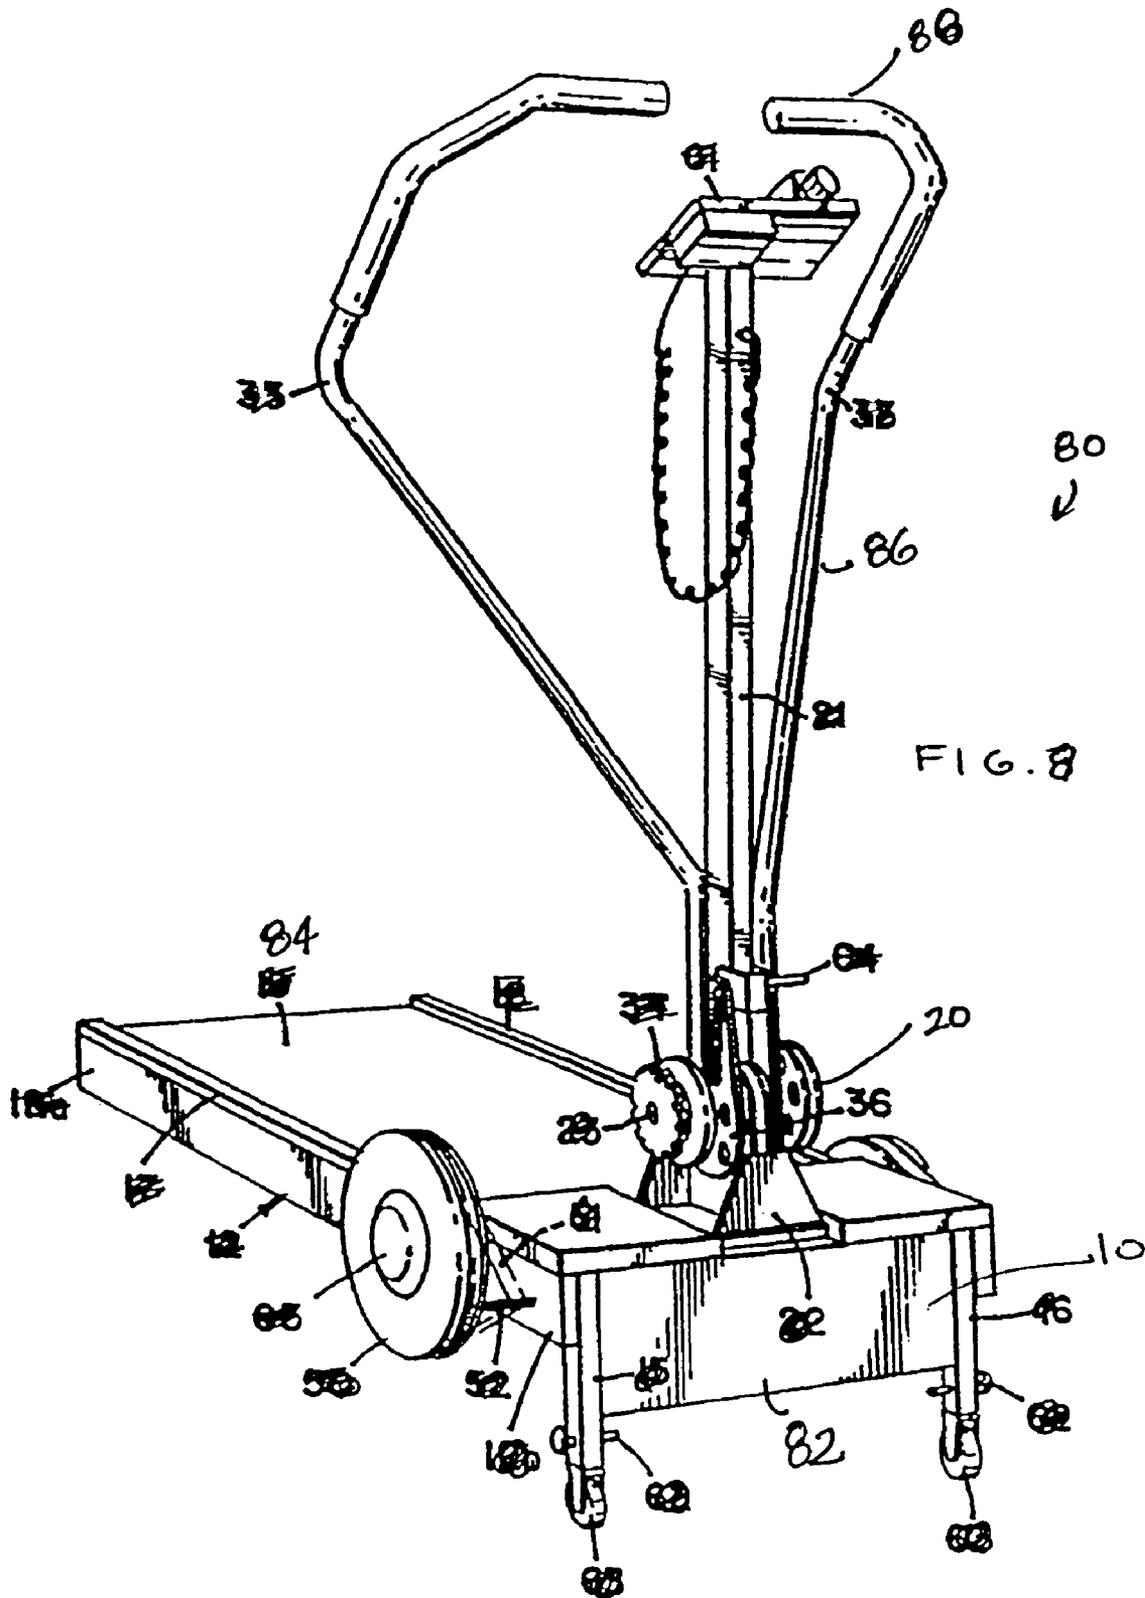

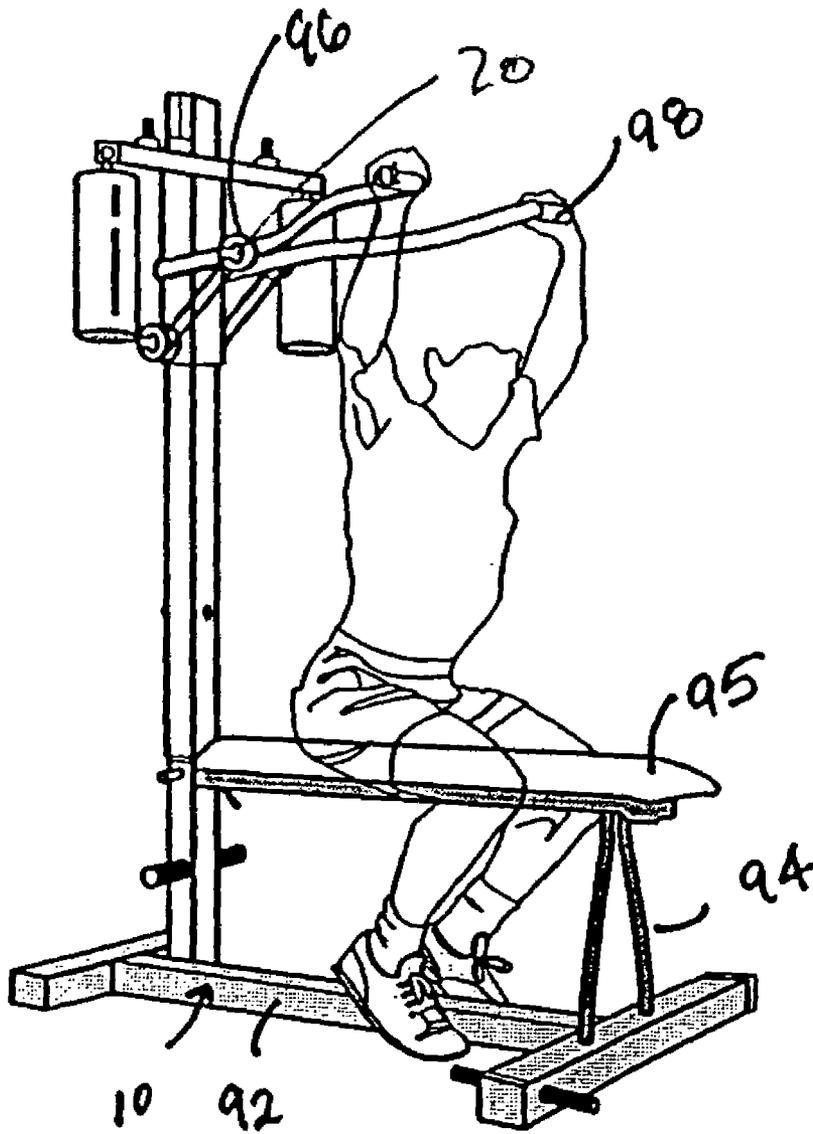

90  
✓

FIG. 9

## VIBRATIONAL LOADING APPARATUS FOR MOUNTING TO EXERCISE EQUIPMENT

### FIELD OF THE INVENTION

The present invention relates to a therapeutic apparatus and, more specifically, to an apparatus for enhancing the benefits of exercise and physical therapy with osteogenic healing.

### BACKGROUND OF THE INVENTION

The benefits of exercise and physical therapy have been well documented and include aerobic conditioning, strength enhancement, and rehabilitation. Exercises such as walking, running, weight lifting, bicycling, swimming, and rowing have also been proven beneficial in osteogenic repair and maintenance. More specifically, a program of exercise has been proven to stimulate bone-tissue cell activity through the application of mechanical loading at specific frequency levels to facilitate bone tissue growth, repair, and maintenance. However, to attain such osteogenic benefits from exercise, oftentimes the exercise must be sustained for extended periods of time and the regimen maintained indefinitely. Furthermore, regular and extended aggressive exercise and impact loading used as a bone-tissue treatment protocol may be both difficult to maintain and dangerous to the participant, especially the elderly. In fact, high loading activity could precipitate the fracture that the exercise was intended to prevent.

U.S. Pat. Nos. 5,103,806, 5,191,880, 5,273,028 and 5,376,065 to McLeod et al., the contents of each being incorporated herein by reference, relate to noninvasive methods and apparatus for preventing osteopenia, promoting bone tissue growth, ingrowth, and healing of bone tissue. As disclosed U.S. Pat. Nos. 5,273,028 and 5,376,065, the application of physiologically-based relatively high frequency, relatively low level mechanical load-to-bone tissue at the proper parameters provides significant beneficial effects with respect to bone tissue development and healing. These patents disclose an apparatus for imparting the desired mechanical load to the bone. The apparatus includes a surface upon which a patient may sit or stand. An actuator or transducer is positioned under the surface to provide the vibration necessary to achieve the desired osteogenic benefits. The methods and apparatus disclosed in these patents have proven successful in preventing bone loss or osteopenia and encouraging new bone formation.

### SUMMARY OF THE INVENTION

The present invention is directed to systems and methods for combining the principles of osteogenic repair with therapeutic measures to thereby increase the osteogenic effect, as well as to obtain the benefits of therapies such as exercise, including but not limited to muscle tissue development and aerobic conditioning. One advantage of this invention over conventional exercise regimens and conventional osteogenic treatment is that a patient may optimize the time the patient spends receiving osteogenic treatments. In this manner, the invention has the potential to improve patient compliance with an osteogenic regimen.

According to one aspect of the various embodiments of the invention, osteogenic treatments are delivered to a patient who is exercising or undergoing a therapeutic treatment using a therapeutic device. As used herein, "therapeutic device" refers to any exercise or other type of device

designed to impart a beneficial effect to one or more portions of a patient's body, with or without the active participation of the patient. The phrase "exercise" refers to activity undertaken to achieve a beneficial effect, such as improved physical fitness or ability, range of motion, balance, coordination, flexibility, weight control, cardiovascular health, pain relief, stress relief, healing, strength, speed, endurance, or general physical and mental health and well being.

The therapeutic device includes means for developing or maintaining fitness of bodily tissue or organs, which, in certain embodiments is an exercise device. The exercise device includes a frame and/or a support surface for supporting at least a portion of the bodily tissue of an individual using the device. According to an aspect of this invention, at least one loading means, is associated with the frame and/or support surface for driving the support surface at a selected load and frequency. The term "loading means" includes, without limitation, linear or rotary loading mechanisms, further linear actuators, rotary actuators, actuators that provide both linear and rotary motions, transducers and the like. The loading mechanism thereby induces mechanical loading of bodily tissue adjacent to or supported by the support surface sufficient to facilitate the growth, development, strengthening, and/or healing of bone tissue. The loading mechanism may include an actuator or transducer operatively associated with the support surface. The loading mechanism may be associated with a support surface of any exercise device, including standard exercise devices such as rowing machines, stair climbing machines, elliptical trainers, bicycles, cross-country ski trainers, treadmills, Pilates machines, or weight training machines. As used herein, the term "means for developing or maintaining fitness of bodily tissue or organs" includes, without limitation all of the above-mentioned exercise devices and any equivalents thereof. The support surface may be a stationary element of the exercise device, such as a seat, or an active element, such as a pedal. When the patient uses the therapeutic device of the present invention, the benefits associated with the intended therapy are thereby enhanced by the additional mechanical loading supplied by the loading mechanism.

In conjunction, or in the alternative, at least one loading mechanism can be associated with a rotational element of the exercise device, according to this invention. According to this aspect, an appendicular support surface of the rotational element, such as a pedal or handle, delivers mechanical loading to the patient's body part that contacts the surface, as the patient grips or presses the appendicular support surface of the rotational element of the exercise device.

The various embodiments of the invention provide a method of developing and maintaining fitness of bodily tissue and organs and healing, strengthening, and promoting growth of bone tissue. The therapeutic device is provided by associating a transducer or other loading mechanism with the support surface. If the loading mechanism is a rotary loading mechanism, the loading mechanism is also associated with a rotational element of the therapeutic device, the rotational element being associated with the support surface. Healing, strengthening, and promoting growth of bone tissue is accomplished at least in part by adapting each linear or rotary loading mechanism to load the bodily tissue at a frequency ranging from about 10 Hz to about 100 Hz, and within a range up to an upper limit of about 2 millimeters displacement peak-to-peak.

Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become more apparent to those

skilled in the art upon examination of the following, or may be learned by practice of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form part of the specification, illustrate the present invention when viewed with reference to the description, wherein:

FIG. 1 illustrates an exemplary linear loading mechanism for providing mechanical and cyclical loading to facilitate osteogenesis as disclosed in U.S. Pat. Nos. 5,273,028 and 5,376,065;

FIG. 2 illustrates an exemplary rotary loading mechanism for providing mechanical and cyclical loading to facilitate osteogenesis;

FIG. 3 is a perspective view of a stationary bicycle that incorporates linear and rotary loading mechanisms, according to various aspects of the invention;

FIG. 4 is a perspective view of a rowing machine according to an exemplary embodiment of the invention;

FIG. 5 is a perspective view of a stair climbing machine according to an exemplary embodiment of the invention;

FIG. 6 is a perspective view of an elliptical trainer according to an exemplary embodiment of the invention;

FIG. 7 is a perspective view of a cross-country ski trainer according to an exemplary embodiment of the invention;

FIG. 8 is a perspective view of a treadmill according to an exemplary embodiment of the invention; and

FIG. 9 is a perspective view of a weight training machine according to an exemplary embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention incorporates an osteogenic loading mechanism into therapeutic equipment. In certain embodiments of the invention, applied use induces mechanical strains on the order of 50 to 500 microstrain (i.e., 50-500 times  $10^{-6}$  strain) with a frequency range of 10 to 100 Hz, and preferably within the range of 15 to 30 Hz, into the appendicular and/or axial skeleton. The strain may be induced with peak-to-peak displacements of no more than about 2 millimeters. Such parameters provide at least the following beneficial effects: 1) maintenance of bone mass/prevention of osteoporosis; 2) promotion of bone ingrowth into implants or prosthesis; and 3) acceleration of fracture healing. Further details of the loading mechanism may be ascertained by reference to the McLeod patents.

FIG. 1, as disclosed in U.S. Pat. Nos. 5,273,028 and 5,376,065 to McLeod et al., the entirety of which have been previously incorporated herein by reference, illustrates one embodiment of a loading mechanism for mechanically and cyclically loading bone tissue to induce bone growth for osteogenic repair of bone tissue. Briefly stated, the linear loading mechanism 10 of FIG. 1 includes upper and lower rigid plates 11, 12 spaced apart by two oppositely bowed sheets 13, 14, (e.g., of spring steel). The opposite bowing of sheets 13, 14 creates a vertical separation between the sheets 13, 14 to permit mounting of an actuator or transducer 15, 15' between the bowed region of sheets 13, 14. The patient stands or sits stationary on the rigid plate 11 and, upon activation, the actuator or transducer stimulates the rigid plates 11, 12 to impart mechanical stress to the patient. The patents disclose means for activating and controlling the load delivered to the patient. The strain resulting from this stress causes the desired osteogenesis. Any effective method

or means for creating a coordinated displacement between the rigid plates 11, 12 may be used to deliver a mechanical load to a patient and all such methods or means are within the scope of the invention.

Another way of delivering a mechanical load to a patient is with a rotary loading mechanism 20, as shown in FIG. 2. The device illustrated includes a rotary actuator or transducer, such as an eccentric cam. The rotary loading mechanism 20 is rotatably supported and aligned with a pivot axis of a shaft or similar component of an exercise machine. In FIG. 2, the rotary actuator or transducer converts mechanical or electromechanical energy into vibrational stimulation of the appendicular support surface. In the embodiment shown, an eccentric cam comprises a revolving disk and shaft assembly 22 with the axis of rotation displaced from the geometric center of the revolving disk 24, as indicated by the various unequal radii depicted as  $r_1$ ,  $r_2$ ,  $r_3$ , and  $r_4$ . Eccentricity can also be attained by creating deformations on the surface of the revolving disk 24 such that the deformations interact with the rotational mechanism of the shaft assembly 22 to produce vibration. As power is applied to the shaft and the motor is thus turned, its surface comes into contact at various points with the inner surface of the stator. The rotation of the rotor and subsequent contact between its outer surface and the stator causes the assembly to vibrate. Because the stator is rigidly, or semi rigidly attached to the exercise device, this vibration is transferred to the exercise device, and hence to the patient using the exercise device.

The eccentric cam may be combined with other elements to form an electromechanical actuator such as an actuator including a rotor and a stator. An electromechanical actuator improves the flexibility of the exercise device, by reducing the correlation between the rate at which the patient operates the device and the frequency of the resultant vibration. The electromechanical actuator can be preset and adjustable so as to deliver stimulation at the desired frequency regardless of the speed at which the patient moves the exercise device, such as by pedaling, stepping, walking, or swinging arm levers.

FIGS. 3-9 illustrate alternative therapeutic devices in which a loading mechanism, such as the linear loading mechanism disclosed in U.S. Pat. Nos. 5,273,028 and 5,376,065, or the rotary loading mechanism disclosed in FIG. 2, may be incorporated to combine the osteogenic benefits of mechanical loading with therapeutic effects, such as the aerobic and strength benefits inherent in exercise. Additional mechanical loading capabilities may be imparted to the therapeutic devices in a variety of ways.

To establish the desired amplitude of resonance in the targeted bodily tissue, it is advantageous to impart mechanical and cyclical strain while the bodily tissue is simultaneously mechanically stressed, either by the static interaction of gravity with body weight, or by exertion of the muscles in the targeted bodily tissue. Moreover, the mechanical and cyclical strain is preferably applied so as to produce stimulating displacements in alignment with the mechanical stress.

In certain embodiments, the entirety or a portion of a therapeutic device rests on a substrate having a linear loading mechanism. Activation of the linear loading mechanism and consequent stimulation of the substrate thereby stimulates the therapeutic device or part thereof resting on the substrate. In these embodiments, mechanical and cyclical strain may be primarily imparted to the axial skeleton. The simultaneous mechanical stress is provided by static gravitational strain. For example, the loading mechanism may include a piezoelectric transducer. The transducer is

coupled to the therapeutic device so as to vibrate the device at a frequency ranging from about 10 Hz to about 100 Hz. Desirably, the transducer provides a peak-to-peak displacement of up to 2 mm.

In other embodiments, a linear or rotary loading mechanism is incorporated into a dynamic, i.e., movable, element of the physical structure of the therapeutic device to impart the desired stimulation. In this way, the mechanical and cyclical loading of different parts of the device, and thus of different parts of the patient, may be controlled. For example, a loading mechanism **10**, **20** may be incorporated into a stationary bicycle **30**, such as that disclosed in U.S. Pat. No. 4,917,376 to Lo, the contents of which are incorporated herein by reference, to cause vibration of the entire bicycle or just a portion thereof (for example, to appendicular support surfaces such as handlebars **36**, or pedals **38**). As shown schematically in FIG. **3**, the linear loading mechanism **10** of FIG. **1** may be incorporated into the base **32** of the bicycle **30** to impart mechanical and cyclical loading indirectly via a seat support member **33** into the seat **34** of the bicycle **30**. The linear loading mechanism **10** can also be incorporated directly into the seat **34** of the bicycle **30**. In either configuration, the linear loading mechanism **10** is positioned and calibrated to provide the desired mechanical and cyclical loading to achieve osteogenesis, such as to relieve or reverse osteopenia of the spine while providing the aerobic and strength enhancing qualities of the exercise bike **30**. In the alternative, or in conjunction, a rotary loading mechanism **20** can be incorporated into a rotational element of the bicycle **30**. For example, the exercise bicycle of FIG. **3** includes swing levers **35** positioned to be swung manually each in an opposite direction toward and away from the torso of the patient. The patient alternately pushes and pulls the handles **36** of the swing levers **35** to achieve the swinging motion. A rotary loading mechanism **20** can be incorporated at the pivot axis **37** of each swing lever **35** so as to impart mechanical strain to targeted bones. Rotary loading mechanisms **20** can also be incorporated in each pedal assembly **38** and in any of the sprocket assemblies **39** included in the bicycle **30**.

In use, a patient operates the bicycle **30** in an ordinary manner, in that no unusual steps or motions are required. The patient's feet push the pedal assemblies **38** while the patient sits on the seat **34**, which may be vertically adjustable by telescopic movement of the seat support member **33**. While the patient sits on the seat **34**, one or more linear loading mechanisms **10** can be activated so as to drive the support surface, e.g., the seat **34**. Each linear loading mechanism **10** interacts with the axial compressive static strain on the patient's spine and pelvic girdle caused by body weight. This interaction mechanically and cyclically imparts negative force in the form of compression and positive force in the form of tension to the spine and other axial members of the patient's skeleton. The resultant strain induces a sinusoidal displacement of the patient's bodily tissue that preferably does not exceed 2 millimeters. Movement of the pedal assemblies **38** rotates a sprocket **39**, which is integral to a mechanism for generating resistance against the patient's efforts to pedal the exercise bicycle **30**. While the patient moves the pedal assemblies **38**, one or more rotary loading mechanisms **20** can be activated so as to interact with compressive forces caused by the bicycle's resistance opposing at least the proximal, middle, and distal segments of the lower members of the patient's appendicular skeleton.

As a result, the invention can apply strain to elements of either or both the axial or the appendicular skeleton that are

concurrently experiencing muscular stress. This is believed to increase the benefit of the treatment to the patient.

Preferably, the loading mechanisms **10** and **20** can be adjusted to vary the strain imparted, and the frequency at which the loading cycles. For instance, the therapeutic device preferably provides the desired strain at the desired frequency regardless of the patient's weight, level of exertion, or exercise rate. Methods of controlling the strain and frequency of a linear loading mechanism **10** are described in U.S. Pat. No. 5,376,065. In addition, the control panels of the exercise devices can be adapted for entry of pertinent information about the patient, such as weight, strength level, existence of injury, etc., which can determine the appropriate amount of strain for that patient. User entry is particularly useful for controlling strain and frequency in a rotary loading mechanism **20**, which is not as dependent upon body weight.

Other therapeutic devices, including but not limited to rowing machines, stair climbing machines, elliptical trainers, cross-country ski trainers, and treadmills, may be similarly adapted to impart mechanical and cyclical loading to appendicular support surfaces, such as seat supports, foot supports, to axial support surfaces, such as the base or other stationary component, or to a combination thereof or a component of either or both appendicular and axial support surfaces. Although the figures and description below may reference the use of both linear and rotary loading mechanisms for illustrative purposes, it will be understood that either loading mechanism may be present alone in a particular embodiment.

For example, FIG. **4** illustrates a rowing machine **40**. The loading mechanisms **10**, **20** of this invention can be implemented in several different elements of the rowing machine **40**. A linear loading mechanism **10** can be incorporated into the base of the rowing machine **40** at any of a number of locations on the frame. For instance, a linear loading mechanism **10** can be placed adjacent to foot rests **42**, **42'** or positioned where the rigid frame **44** contacts the floor. As a result, either the first rate or the entire frame can be cyclically loaded. In addition a rotary loading **20** mechanism positioned adjacent to the handlebars **46**, e.g. a pivot point **47** of a swing lever **48**, can impart mechanical and cyclical loading to a patient's arms. A seat **49** may also include mechanisms to generate a mechanical stress to a user seated thereon.

FIG. **5** illustrates a stair climbing machine **50** disclosed in U.S. Pat. No. RE34,959 to Potts, the contents of which are incorporated by reference. A linear loading mechanism **10** can be incorporated in the base **52** to impart mechanical and cyclical loading to patient's upper appendages and torso via the bars **54**, when the patient uses the bars **54** to support a portion of the patient's body weight. A rotary loading mechanism **20** can be incorporated at the pivot point **56** of the stepping mechanism, so as to impart mechanical and cyclical loading to the patient's lower appendages and torso via the pedals **58**.

FIG. **6** illustrates an elliptical trainer **60**. Rotary loading mechanisms **20** can be incorporated into the pivot points **61** of the swing levers **62** so as to impart mechanical and cyclical loading to the patient's upper appendages and torso via handles **64**. Rotary loading mechanisms **20** can also be incorporated into the flywheel **66** components or pedal bushings **67** of the elliptical trainer **60**, so as to impart mechanical and cyclical loading to the patient's lower appendages and torso via pedals **68**. A linear loading mechanism **10** can also be incorporated into the base **69** of the elliptical trainer **60**.

FIG. 7 illustrates a cross-country ski trainer 70 disclosed in U.S. Pat. No. 5,000,442 to Dalebout et al., incorporated herein by reference. A linear loading mechanism 10 can be incorporated in the base 72 of the ski trainer 70 to impart mechanical and cyclical loading to the foot plate 74 of each ski 76. Alternatively, or in addition, rotary loading mechanisms 20 can be incorporated into the roller mechanism 77 that imparts motion to the skis. Rotary loading mechanisms 20 can also be incorporated in the pulleys or pivot points 78 of the arm cords or swing levers 79, respectively.

FIG. 8 illustrates a treadmill 80 disclosed in U.S. Pat. No. 5,431,612 to Holden, incorporated herein by reference. A linear loading mechanism 10 can be incorporated into the base 82 of the treadmill 80 so as to impart mechanical and cyclical loading via the treading surface 84. Rotary loading mechanisms 20 can be incorporated at the pivot point 84 of each swing arm 86 so as to impart mechanical and cyclical loading via each handle 88.

FIG. 9 illustrates a weight training machine 90. A linear loading mechanism 10 can be incorporated into the base 92 so as to impart mechanical and cyclical loading to the patient's spine and axial skeleton via upright supports 94 and the seat 95. Rotary loading mechanisms 20 can be incorporated at pivot points 96 of the handles 96 so as to impart mechanical and cyclical loading to the patient's upper appendicular skeleton as the patient pushes or pulls the handles 96 obtain the desired resistance for the weight training effect.

Incorporation of a loading mechanism into therapeutic equipment is not limited to stationary equipment, but rather may also be utilized with a mobile therapeutic device, such as a bicycle. All of these or similar devices may incorporate the mechanical and cyclical linear or rotary loading mechanisms in accordance with the principles of the present disclosure.

One skilled in the art may readily appreciate various arrangements to mount the loading mechanism to or incorporate the loading mechanism into the therapeutic device. For example, the loading mechanism may be in the general shape of or attached to one or more weight bearing elements of the equipment. For example, the loading mechanism maybe part of or shaped of, or attached to the seat of the therapeutic device, e.g. mounted to the underside of the surface with fixation devices such as bolts or other appropriate fasteners. Additionally, or alternatively, the loading mechanism may be shaped as, and attached to, the foot supports of the therapeutic device, such as the pedals of a bicycle, foot rests of the stair climber, elliptical trainer, and cross-country ski trainer, or the flat plate under the tread of the treadmill. Each therapeutic device may include any combination of mechanical and electromechanical linear or rotary loading mechanisms, each being incorporated in an element of the therapeutic device so as to achieve the desired osteogenic result. In some embodiments, each of the various types of therapeutic equipment could be supported on a device that would transmit a mechanical loading to the equipment relative to the ground.

The foregoing is provided for the purpose of illustrating, explaining and describing embodiments of the present invention. Further modifications and adaptations to these embodiments will be apparent to those skilled in the art and may be made without departing from the spirit of the invention or the scope of the following claims. For example,

the therapeutic devices described herein do not represent an exhaustive list of possible embodiments, and are not intended to limit the invention to the precise forms disclosed. Furthermore, the principles of cyclical mechanical loading can be implemented in any element of a therapeutic device through which stimulation can be transferred to appropriate physiological structures.

What is claimed is:

1. A vibrational loading apparatus for mounting to a surface of an exercise device including a support surface for supporting at least part of the bodily tissue of an individual, the vibrational loading apparatus comprising:

a vibrational loading mechanism capable of generating a vibrational force; and

a mounting apparatus adapted to mount the vibrational loading mechanism to the exercise device for delivering vibrations to the support surface.

2. The vibrational loading apparatus according to claim 1, wherein the vibrational force generated by the vibrational loading mechanism drives the support surface at a frequency for inducing mechanical vibration of bodily tissue adjacent to or supported by the support surface.

3. The vibrational loading apparatus according to claim 1, wherein the support surface of the exercise device is a component of a seat support.

4. The vibrational loading apparatus according to claim 2, wherein the support surface of the exercise device is a component of a seat support.

5. The vibrational loading apparatus according to claim 1, wherein the support surface of the exercise device is a component of a lower extremity support.

6. The vibrational loading apparatus according to claim 1, wherein the support surface of the exercise device is a component of a foot support.

7. The vibrational loading apparatus according to claim 1, wherein the support surface of the exercise device is a component of an upper extremity support.

8. The vibrational loading apparatus according to claim 1, wherein the support surface of the exercise device is a component of a handle.

9. The vibrational loading apparatus according to claim 1, wherein the vibrational loading mechanism comprises a transducer.

10. The vibrational loading apparatus according to claim 9, wherein the transducer is adapted to be driven so as to vibrate bodily tissue supported by the support surface at a frequency ranging from about 10 Hz to 100 Hz.

11. The vibrational loading apparatus according to claim 9, wherein the transducer is adapted to be driven so as to have a peak-to-peak displacement up to about 2 millimeters.

12. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises a bicycle.

13. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises a rowing machine.

14. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises a weight training machine.

15. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises a treadmill.

16. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises an elliptical trainer.

17. The vibrational loading apparatus according to claim 1, wherein the exercise device comprises a stair climbing machine.

18. The vibrational loading apparatus according to claim 1, wherein the vibrational loading mechanism is a rotary vibrational loading mechanism operatively associated with a

9

rotational element associated with the support surface of the exercise device when the vibrational loading mechanism is mounted to the exercise device for driving the support surface at a frequency for inducing mechanical vibration of bodily tissue adjacent to or supported by the support surface. 5

19. A method of developing and maintaining fitness of bodily tissue or organs or of healing, strengthening, or promoting growth of bone tissue, or any combination thereof using an exercise device that includes a support surface for supporting bodily tissue of an individual, the method comprising: 10

mounting a vibrational loading mechanism to the exercise device, wherein the vibrational loading mechanism is capable of generating a vibrational force to the support surface; and 15

actuating the vibrational loading mechanism for vibrating the support surface to induce mechanical vibration of

10

the bodily tissue adjacent to or supported by the support surface.

20. The method according to claim 19, wherein the mechanical vibration is provided by a rotational element associated with the support surface.

21. The method according to claim 19, wherein the mechanical vibration is provided by a transducer.

22. The method according to claim 19, wherein the mechanical vibration is provided at a frequency ranging from about 10 Hz to about 100 Hz.

23. The method according to claim 19, wherein the mechanical vibration displaces the bodily tissue up to about 2 millimeters peak-to-peak.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,322,948 B2  
APPLICATION NO. : 11/087248  
DATED : January 29, 2008  
INVENTOR(S) : Talish et al.

Page 1 of 6

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The title page showing the illustrative figure should be deleted to be replaced with the attached title page.

The drawing sheets, consisting of Figs. 1-4, should be deleted to be replaced with the drawing sheets, consisting of Figs. 1-4, as shown on the attached page.

Col. 1, line 3, insert the following paragraph in the specification, after the title, as follows:

--CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. Application Serial No. 10/265,785 (now U.S. Patent No. 7,166,067) filed October 7, 2002. The patent and pending-application are both incorporated herein by reference in their entirety.--

Signed and Sealed this

Seventh Day of April, 2009



JOHN DOLL  
*Acting Director of the United States Patent and Trademark Office*

(12) **United States Patent**  
**Talish et al.**

(10) **Patent No.:** US 7,322,948 B2  
 (45) **Date of Patent:** \*Jan. 29, 2008

(54) **VIBRATIONAL LOADING APPARATUS FOR MOUNTING TO EXERCISE EQUIPMENT**

6,217,491 B1 \* 4/2001 Schiessl ..... 482/92  
 6,659,918 B2 \* 12/2003 Schiessl ..... 482/92

(75) **Inventors:** Roger J. Talish, Hillsborough, NJ (US); Kenneth J. McLeod, Vestal, NY (US); Clinton T. Rubin, Port Jefferson, NY (US)

\* cited by examiner

(73) **Assignee:** Juvent, Inc., Somerset, NJ (US)

*Primary Examiner*—Lori Amerson

(\* **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(74) *Attorney, Agent, or Firm*—Carter, DeLuca, Farrell & Schmidt, LLP

(57) **ABSTRACT**

This patent is subject to a terminal disclaimer.

A therapeutic device, such as an exercise device, includes the principles of osteogenic repair by incorporating a loading mechanism into the exercise device. By doing so, the therapeutic device provides an increased osteogenic effect, thereby enhancing the benefits of the therapy. As an example, a exercise device includes a support surface for supporting all or part of the bodily tissue of an individual using the device. A linear or rotary loading mechanism associated with the frame or a rotational element of the exercise device drives the support surface at a selected load and frequency, thereby inducing mechanical loading of bodily tissue adjacent to the support surface sufficiently to facilitate the growth, development, strengthening, and/or healing of bone tissue. The loading mechanism may be incorporated into any exercise device, including standard exercise devices such as rowing machines, stair climbing machines, elliptical trainers, bicycles, cross-country ski trainers, treadmills, or weight trainers.

(21) **Appl. No.:** 11/087,248

(22) **Filed:** Mar. 23, 2005

(65) **Prior Publication Data**

US 2005/0165332 A1 Jul. 28, 2005

(51) **Int. Cl.**  
 A63B 23/00 (2006.01)

(52) **U.S. Cl.** ..... 601/49; 482/148

(58) **Field of Classification Search** ..... 482/148;  
 601/49


See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS


6,032,677 A \* 3/2000 Blechman et al. .... 128/899

**23 Claims, 9 Drawing Sheets**

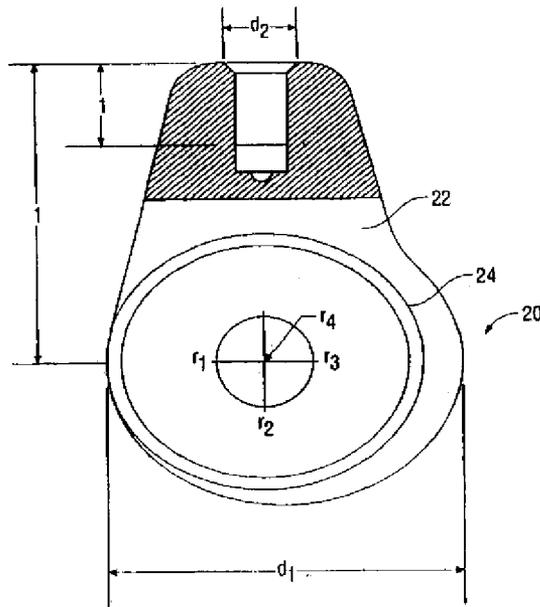

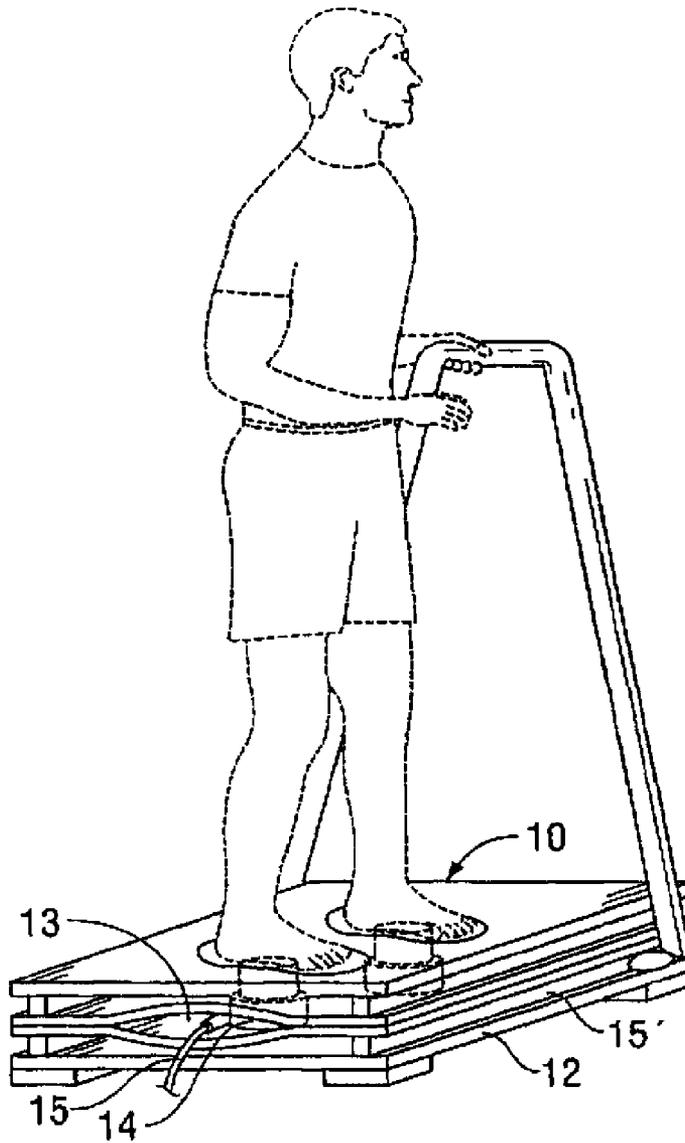

**FIG. 1**  
**(Prior Art)**

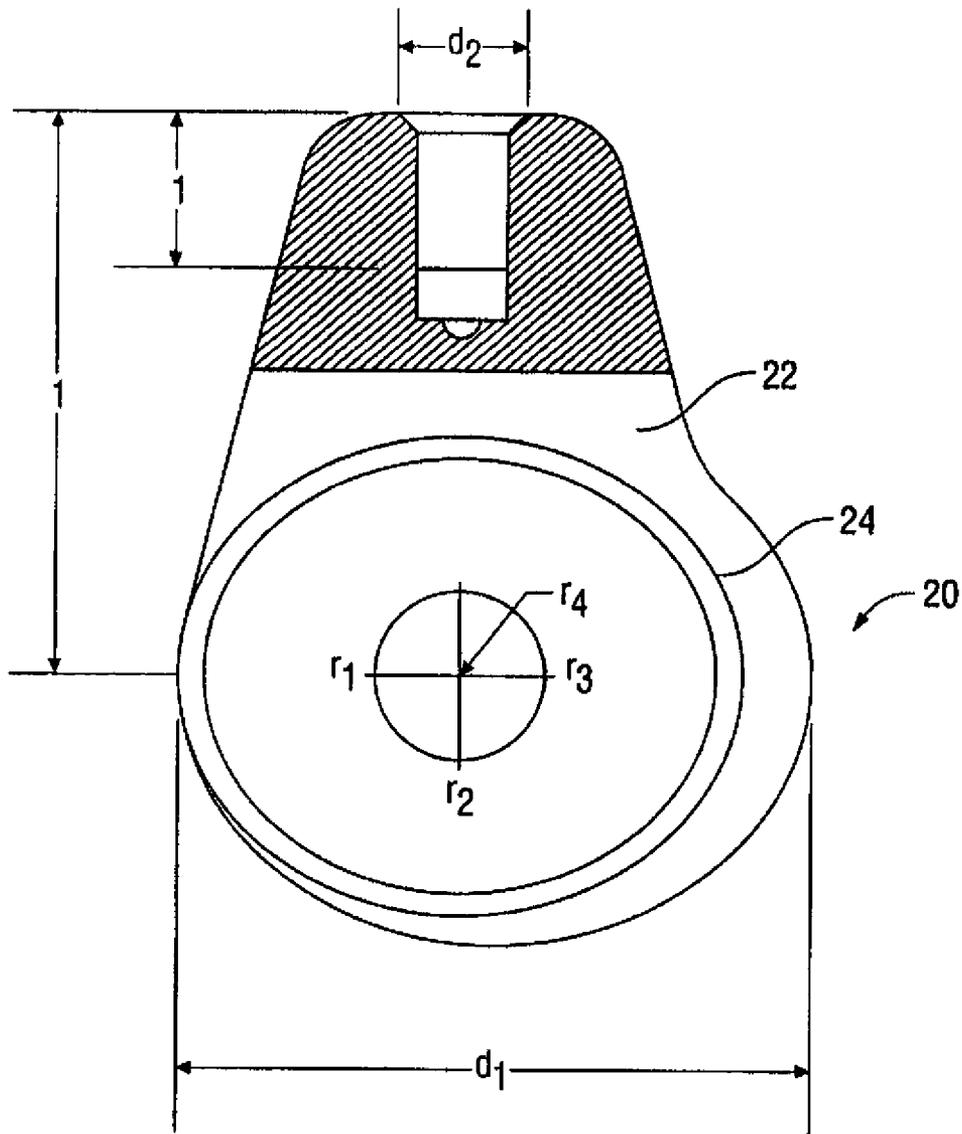

**FIG. 2**  
**(Prior Art)**

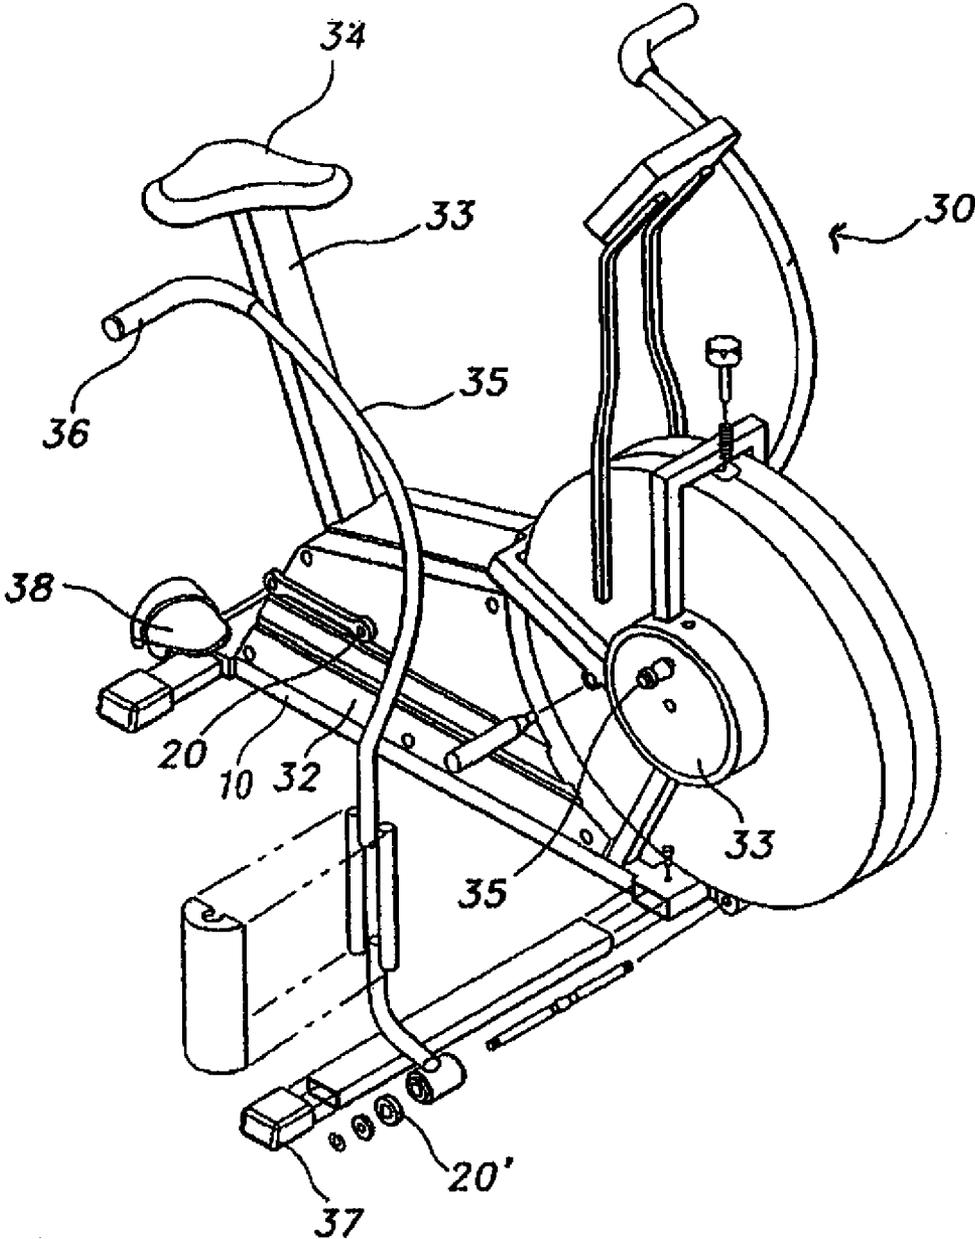


FIG. 3

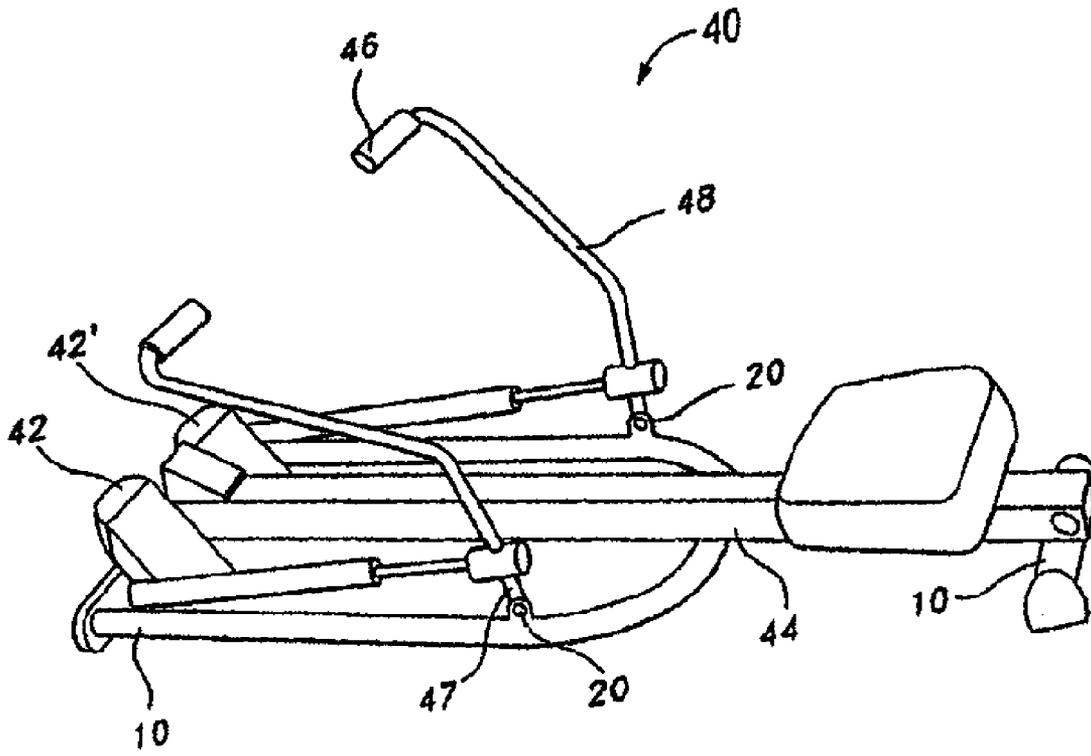


FIG. 4